

PERMEABLE INTERLOCKING
CONCRETE PAVER
(PICP) SYSTEM
USING AQUA-BRIC 4 "L"

CONCRETE EDGE
RESTRAINT AROUND
PERIMETER

OUTLET PIPE

CLEANOUT/
INSPECTION
PORT (TYP.)


UPTURNED ELBOW/RAISED
OUTLET (OPTIONAL)

UNDERDRAIN
(OPTIONAL)

PLAN VIEW

NTS

Raster (module) 250

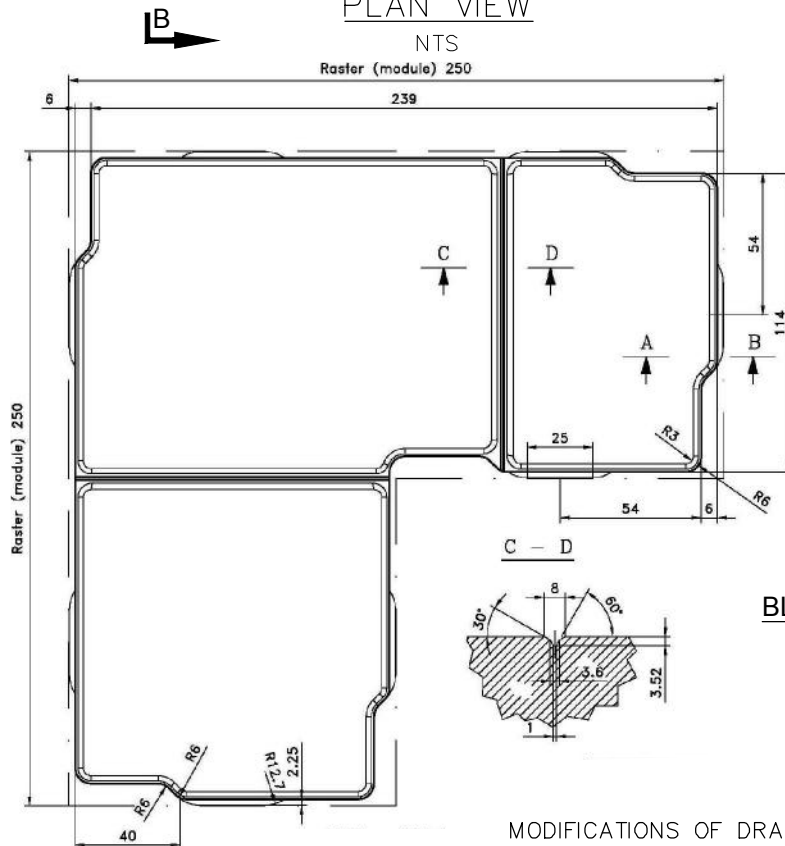

NOTE:

DESIGNERS SHOULD SPECIFY ONE OF THREE TYPES OF PICP DESIGN INTENT: FULL INFILTRATION REQUIRES HIGH INFILTRATION RATES IN THE SUBGRADE AND THEREFORE DOES NOT INCLUDE AN UNDERDRAIN; PARTIAL INFILTRATION ALLOWS INFILTRATION BUT ALSO INCLUDES A PIPE UNDERDRAIN WHICH IS THE MOST COMMON TYPE OF DESIGN; NO INFILTRATION REQUIRES THE USE OF AN IMPERMEABLE LINER THAT PREVENTS INFILTRATION.

BLOCK DIMENSIONS
NTS

MODIFICATIONS OF DRAWINGS ARE ONLY PERMITTED BY WRITTEN AUTHORIZATION FROM EAGLE BAY

DATE: 05-01-15

DWG: 1 OF 14